POSIFLEX

Multifunctional POS Peripherals

- MONITOR
- MAGNETIC STRIP READER
- CUSTOMER LINE DISPLAY
- POS PRINTER
- PROGRAMMABLE KEYBOARD
- SIGNATURE PAD
- BARCODE SCANNER
- CASH DRAWER
- SYSTEM SIDE ATTACHMENT

Monitor

LM-2008E

- 8” TFT LCD panel
- LCD resolution up to 800 x 600
- Easy tilt angle adjustment
- Optional VESA mounting kit (WB-6812)
- Dimension : 220.47 mm (H) x 209.95 mm (W) x 211.73 mm (D); Weight : 0.96 kg
- Color : Ivory or black

LM-2210X

- 10.1” TFT LCD panel
- LCD resolution up to 1024 x 768
- Easy tilt angle adjustment
- VESA mounting support
- Dimension : 221 mm (H) x 246.8 mm (W) x 194 mm (D); Weight : 1.31 kg
- Color : Ivory or black

LM-2012X / TM-2012X

- Compact design, ideal for cramped space
- High Quality 12.1” TFT LCD panel
- LCD resolution up to 1024 x 768
- 5-wire resistive touch panel for TM-2012X
- Optional side attachment support (SD-366)
- Flexible installation with VESA mounting support
- Dimension : 261.67 mm (H) x 298 mm (W) x 253.71 mm (D); Weight : 2.48 kg
- Color : Ivory or black

LM-8115G / TM-8115G

- 15” TFT LCD panel
- LCD resolution up to 1024 x 768
- 5-wire resistive touch panel for TM-8115G
- Easy tilt angle adjustment from 18° to 75°
- 2 x USB port support
- Optional side attachment support (SD-466Z or KP-300W)
- Optional VESA mounting kit (WB-6000V-B)
- Dimension : 345 mm (H) x 377.7 mm (W) x 254 mm (D); Weight : 5.69 kg
- Color : black

TM-7117X

- 17” TFT LCD panel
- LCD resolution up to 1280 x 1024
- 5-wire resistive touch panel
- Easy tilt angle adjustment from 15° to 70°
- 2 x USB port support
- Optional side attachment support (SD-466Z or KP-300W)
- Optional VESA mounting kit (WB-6000V-B)
- Dimension : 401 mm (H) x 385 mm (W) x 286 mm (D); Weight : 6.82 kg
- Color : black

LM-3110 / TM-3110

- Slim bezel-free design
- 9.7” TFT LCD panel
- LCD resolution up to 1024 x 768
- 5-wire resistive touch panel for TM-3110
- VESA mounting support
- Dimension : 206 mm (H) x 244.5 mm (W) x 187.5 mm (D); Weight : 1.69 kg
- Color : black or white

Monitor

LM-3114 / TM-3114

- Slim bezel-free design
- 14” wide screen TFT LCD panel (16:9 aspect ratio)
- LCD resolution up to 1366 x 768
- 5-wire resistive touch panel for TM-3114
- Optional side attachment support for TM-3114 (SL-104)
- VESA mounting support
- Dimension : 271.2 mm (H) x 371.6 mm (W) x 252 mm (D); Weight : 3.69 kg
- Color : black or white

LM-3115 / TM-3115

- Slim bezel-free design
- 15” TFT LCD panel
- LCD resolution up to 1024 x 768
- 5-wire resistive touch panel for TM-3115
- Optional side attachment support for TM-3115 (SL-105)
- VESA mounting support
- Dimension : 300 mm (H) x 372 mm (W) x 258 mm (D); Weight : 4.71 kg
- Color : black or white

LM-6x07 Series

- USB interface monitor for system without secondary display interface
- 7” TFT LCD panel
- LCD resolution up to 800 x 480
- Dimension : 471 mm (H) x 221.5 mm (W) x 188 mm (D); Weight : 0.86 kg for standalone LM-6207
- Color : black or white
  LM-6207 : Standalone
  LM-6307 : Terminal rear-mount for POSIFLEX 15”/17” KS series terminal
  LM-6507 : Terminal rear-mount for POSIFLEX HS series terminal
  LM-6607 : Terminal rear-mount for POSIFLEX XT series terminal

LM-6210U

- Standalone USB interface monitor for system without secondary display interface
- 9.7” TFT LCD panel
- LCD resolution up to 1024 x 768
- VESA mounting support
- Dimension : 206 mm (H) x 244.5 mm (W) x 187.5 mm (D); Weight : 1.69 kg
- Color : black or white

LM-6101X

- 12.1” base-mount LCD 2nd display for POSIFLEX terminal with 5th generation base
- LCD resolution up to 1024 x 768
- Tilt and Swivel adjustment
- Color : black

LM-6801X

- 12.1” base-mount LCD 2nd display for POSIFLEX terminal with 6th generation base
- LCD resolution up to 1024 x 768
- Tilt and Swivel adjustment
- Color : black

Monitor

LM-2208

- 8” rear-mount LCD 2nd display for POSIFLEX XP series terminal
- LCD resolution up to 800 x 600
- Tilt angle adjustment
- Color : black

LM-2310X

- 10.1” rear-mount LCD 2nd display for POSIFLEX KS-7210 terminal
- LCD resolution up to 1024 x 768
- Tilt angle adjustment
- Color : black or white

LM-2212X

- 12.1” rear-mount LCD 2nd display for POSIFLEX XP series terminal
- LCD resolution up to 1024 x 768
- Tilt angle adjustment
- Color : black

LM-2312X

- 12.1” rear-mount LCD 2nd display for 15”/17” POSIFLEX KS series terminal
- LCD resolution up to 1024 x 768
- Tilt angle adjustment
- Color : black

LM-2412X

- 12.1” rear-mount LCD 2nd display for POSIFLEX KS-7212 terminal
- LCD resolution up to 1024 x 768
- Tilt angle adjustment
- Color : ivory or black

LM-8015

- 15” base-mount LCD 2nd display for POSIFLEX terminal with 5th generation base
- LCD resolution up to 1024 x 768
- 300 mm pole height
- Tilt and Swivel adjustment
- Color : black

Monitor

LM-8025

- 15” base-mount LCD 2nd display for POSIFLEX terminal with 5th generation base
- LCD resolution up to 1024 x 768
- 300 mm pole height
- Optional side attachment support (SD-466Z)
- Tilt and Swivel adjustment
- Color : black

LM-8035

- 15” rear-mount LCD 2nd display for 15”/17” POSIFLEX terminal
- LCD resolution up to 1024 x 768
- Tilt angle adjustment
- Color : black

LM-8045 / TM-8045

- 15” base-mount LCD 2nd display for POSIFLEX terminal with 5th generation base
- LCD resolution up to 1024 x 768
- 5-wire resistive touch panel for TM-8045
- Tilt angle adjustment
- Color : black

LM-8055

- 15” base-mount LCD 2nd display for POSIFLEX terminal with 6th generation base
- LCD resolution up to 1024 x 768
- Tilt angle adjustment
- Color : black

LM-3010F / TM-3010F

- Slim bezel-free design
- 9.7” rear-mount LCD 2nd display for POSIFLEX XT series terminal
- LCD resolution up to 1024 x 768
- 5-wire resistive touch panel for TM-3010F
- Color : black or white

LM-3014F / TM-3014F

- Slim bezel-free design
- 14” rear-mount LCD 2nd display for POSIFLEX XT series terminal
- LCD resolution up to 1366 x 768 (wide screen 16:9 aspect ratio)
- 5-wire resistive touch panel for TM-3014F
- Color : black or white

Monitor

LM-3015F / TM-3015F

- Slim bezel-free design
- 15” rear-mount LCD 2nd display for POSIFLEX XT series terminal
- LCD resolution up to 1024 x 768
- 5-wire resistive touch panel for TM-3015F
- Color : black or white

Magnetic Strip Reader

MR-2106 Series / MR-2200 Series

- Bi-directional swipe
- Heavy duty die-casting housing
- 3-track support
- Support ISO 7811 magnetic card
- Dual head / dual sided swipe support (MR-2200)
- Dimension : 145 mm (W) x 46 mm (D) x 34 mm (H);
  Weight : 0.49 kg
- Interface : USB, Serial or PS/2
- Color : ivory or black

Customer Line Display

PD-7600 Series

- Standalone Graphic STN LCD Customer Line Display
- Blue background with white backlight
- Four-line display with 30 Arabic letters or 15 Chinese characters per line
- Large character size for easy viewing : 8.47 mm x 4.24 mm
- Front display contrast adjustment buttons
- 15°, 30° and 45° tilt angle adjustment
- 270° horizontal swivel adjustment
- Command emulation support : ESC/POS
- Interface : Serial
- Dimension : 221 mm (W) x 110 mm (D) x 431 mm (H); Weight : 0.92 kg for standalone PD-7610R, PD-7620R and PD-7630R

PD-7610R : Standalone (300 mm pole), Simplified Chinese (GB-2312), ivory or black
PD-7611R : Rear-mount with pole (200 mm) for POSIFLEX HT/PB series terminal, Simplified Chinese (GB-2312), black
PD-7612R : Base-mount with pole (200 mm) for POSIFLEX terminal with 5th generation base, Simplified Chinese (GB-2312), black
PD-7613R : Rear-mount with pole (200 mm) for POSIFLEX FT series terminal, Simplified Chinese (GB-2312), black
PD-7614R : Base-mount with pole (200 mm) for POSIFLEX terminal with 6th /7th /8th generation base / 10" & 12" KS terminal / XP series and DT series, Simplified Chinese (GB-2312), black
PD-7620R : Standalone (300 mm pole), Traditional Chinese (BIG-5), ivory or black
PD-7621R : Rear-mount with pole (200 mm) for POSIFLEX HT/PB series terminal, Traditional Chinese (BIG-5), black
PD-7622R : Base-mount with pole (200 mm) for POSIFLEX terminal with 5th generation base, Traditional Chinese (BIG-5), black
PD-7623R : Rear-mount with pole (200 mm) for POSIFLEX FT series terminal, Traditional Chinese (BIG-5), black
PD-7624R : Base-mount with pole (200 mm) for POSIFLEX terminal with 6th /7th /8th generation base / 10" & 12" KS terminal / XP series and DT series, Traditional Chinese (BIG-5), black
PD-7630R : Standalone (300 mm pole), Arabic (Windows code page 01256), ivory or black
PD-7631R : Rear-mount with pole (200 mm) for POSIFLEX HT/PB series terminal, Arabic (Windows code page 01256), black
PD-7632R : Base-mount with pole (200 mm) for POSIFLEX terminal with 5th generation base, Arabic (Windows code page 01256), black
PD-7633R : Rear-mount with pole (200 mm) for POSIFLEX FT series terminal, Arabic (Windows code page 01256), black
PD-7634R : Base-mount with pole (200 mm) for POSIFLEX terminal with 6th /7th /8th generation base / 10" & 12" KS terminal / XP series and DT series, Arabic (Windows code page 01256), black

PD-2600 Series

- VFD Customer Line Display
- Green or Blue screen filter
- Two-line display with 20 characters per line
- Large character size for easy viewing : 9.03 mm x 5.25 mm
- 15°, 30° and 45° tilt angle adjustment
- Various command emulations selectable by DIP switch : ADM, Aedex, ESC/POS, Futaba, Noritake, UTC
- 12 international character sets support
- Dimension : 220 mm (W) x 110 mm (D) x 410 mm (H); Weight : 0.84 kg for standalone PD-2600R and PD-2600UE

PD-2600R : Standalone (300 mm pole), 270° horizontal swivel, Serial interface, ivory or black
PD-2600UE : Standalone (300 mm pole), 270° horizontal swivel, USB HID & USB Virtual COM selectable, ivory or black
PD-2601R : Rear-mount with pole (200 mm) for POSIFLEX HT/PB series terminal, Serial interface, ivory or black
PD-2601UE : Rear-mount with pole (200 mm) for POSIFLEX HT/PB series terminal, USB HID & USB Virtual COM selectable, ivory or black
PD-2602R : Base-mount with pole (200 mm) for POSIFLEX terminal with 5th generation base, Serial interface, black
PD-2602UE : Base-mount with pole (200 mm) for POSIFLEX terminal with 5th generation base, USB HID & USB Virtual COM selectable, black
PD-2603R : Rear-mount with pole (200 mm) for POSIFLEX FT series terminal, Serial interface, black
PD-2603UE : Rear-mount with pole (200 mm) for POSIFLEX FT series terminal, USB HID & USB Virtual COM selectable, black
PD-2604UE : Rear-mount for POSIFLEX 10"/12"/15"/17" KS series terminal, USB HID & USB Virtual COM selectable, black or white
PD-2605UE : Base-mount with pole (200 mm) for POSIFLEX terminal with 6th /7th /8th generation base / 10" & 12" KS terminal / XP series and DT series, USB HID & USB Virtual COM selectable, ivory or black
PD-2606UE : Rear-mount for POSIFLEX XP series terminal, USB HID & USB Virtual COM selectable, black
PD-2607UE : Rear-mount for POSIFLEX HS series terminal, USB HID & USB Virtual COM selectable, black or white
PD-2608UE : Rear-mount for POSIFLEX XT series terminal, USB HID & USB Virtual COM selectable, black or white

Customer Line Display

PD-2800UE

- Standalone VFD Customer Line Display
- Adjustable pole height
- Green or Blue screen filter
- Two-line display with 20 characters per line
- Large character size for easy viewing : 9.03 mm x 5.25 mm
- 15° and 23° tilt angle adjustment
- Various command emulations selectable by DIP switch : ADM, Aedex, ESC/POS, Futaba, Noritake, UTC
- 12 international character sets support
- Interface : USB HID & USB Virtual COM selectable
- Dimension : 200mm (W) x 116 mm (D) x 265 mm ~ 395 mm (H); Weight : 0.48 kg
- Color : Ivory or black

PD-2702

- Embedded VFD Customer Line Display for POSIFLEX EP series terminal
- Two-line display with 20 characters per line
- Command emulations support : Aedex, ESC/POS, Futaba, Noritake, UTC
- Interface : Serial (Internal RS232 in EP series terminal)

PD-201R

- Rear-top mounted LCD Customer Line Display for POSIFLEX DT series terminal
- Single-line display with 16 characters per line
- Command emulations support : PST (POSIFLEX proprietary command) & ESC/POS
- Interface : Serial
- Color : black

PD-320UE

- Standalone LCD Customer Line Display
- Adjustable pole height
- Blue character and yellow background
- Two-line display with 20 characters per line
- Large character size for easy viewing : 6.0 mm x 9.6 mm
- 15° and 23° tilt angle adjustment
- Command emulations support : PST (POSIFLEX proprietary command) & ESC/POS
- Interface : USB HID & USB Virtual COM selectable
- Dimension : 200 mm (W) x 116 mm (D) x 265 mm ~ 395 mm (H); Weight : 0.48 kg
- Color : Ivory or black

Customer Line Display

PD-300 Series

- LCD Customer Line Display
- Blue character and yellow background
- Two-line display with 20 characters per line
- Large character size for easy viewing : 6.0 mm x 9.6 mm
- 15°, 30° and 45° tilt angle adjustment
- Command emulations support : PST (POSIFLEX proprietary command) & ESC/POS
- Dimension : 220 mm (W) x 110 mm (D) x 410 mm (H); Weight : 0.84 kg for standalone PD-300R

PD-300R : Standalone (300 mm pole), 270° horizontal swivel, Serial interface, ivory or black
PD-302 : Rear-mount for POSIFLEX TP series terminal, Serial interface, black
PD-305 : Base-mount for POSIFLEX terminal with 5th generation base, Serial interface, black
PD-308R : Rear-mount with pole (200 mm) for POSIFLEX FT series terminal, Serial interface, black
PD-308UE : Rear-mount with pole (200 mm) for POSIFLEX FT series terminal, USB HID & USB Virtual COM selectable, black
PD-309UE : Base-mount with pole (200 mm) for POSIFLEX terminal with 6th / 7th /8th generation base / 10" & 12" KS terminal / XP series and DT series, USB HID & USB Virtual COM selectable, ivory or black
PD-310UE : Rear-mount for POSIFLEX 10"/12"/15"/17" KS series terminal, USB HID & USB Virtual COM selectable, black or white
PD-330UE : Rear-mount for POSIFLEX XP series terminal, USB HID & USB Virtual COM selectable, black
PD-340UE : Rear-mount for POSIFLEX HS series terminal, USB HID & USB Virtual COM selectable, black or white
PD-350UE : Rear-mount for POSIFLEX XT series terminal, USB HID & USB Virtual COM selectable, black or white

PD-2300 / PD-2300U

- VFD Customer Line Display
- Green or Blue screen filter
- Adjustable pole height
- Two-line display with 20 characters per line
- Large character size for easy viewing : 9.03 mm x 5.25 mm
- 14.5° and 30° tilt angle adjustment
- Near 360° horizontal swivel adjustment
- Various command emulations selectable by DIP switch : ADM, Aedex, ESC/POS, Futaba, Noritake, UTC
- 12 international character sets support
- Interface : Serial (PD-2300) or USB (PD-2300U)
- Dimension : 260 mm (W) x 110 mm (D) x 291 mm ~ 426 mm (H); Weight : 0.93 kg
- Color : Ivory or black

PD-6x07U Series

- 7" Graphical Customer Line Display
- TFT LCD panel with resolution up to 800 x 480
- 20 x 2, 20 x 4, 30 x 4 characters support
- Adjustable font and background color
- JPEG graphics display support
- Command emulations support : ADM, Aedex, ESC/POS, Futaba, Noritake, UTC
- Dimension : 471 mm (H) x 221.5 mm (W) x 188 mm (D); Weight : 0.86 kg for standalone PD-6207U
- Color : black or white

PD-6207U : Standalone (300 mm pole)
PD-6307U : Terminal rear-mount for POSIFLEX 15"/17" KS series terminal
PD-6507U : Terminal rear-mount for POSIFLEX HS series terminal
PD-6607U : Terminal rear-mount for POSIFLEX XT series terminal

POS Printer

AURA PP-9000U

- 3” high-speed thermal printer with auto cutter
- Stylish curvy design
- Spill-resistant
- Up to 300 mm/sec in low-noise printing
- High-resolution printing up to 8 dots/mm and 640 dots/line
- 83 mm, 80 mm or 58 mm paper width support
- QR code and PDF417 printing support
- Wall-mount ready for flexible deployment
- ”Drop-and-load” action for easy paper roll replacement
- Easy paper jam clearance with one push on“Hood Release Button”
- Control over 2 cash drawers through 1 CR port
- Optional kitchen bell function
- Interface : USB (True USB & Virtual COM selectable) + optional Serial, Parallel, LAN or Wireless interface module
- Dimension : 148 mm (W) x 205 mm (D) x 143 mm (H); Weight : 1.2 kg
- Color : ivory, black or white

AURA PP-8800U

- 3" high-speed thermal printer with auto cutter
- External cover for spill-resistance (optional)
- Up to 220 mm/sec in low-noise printing
- High-resolution printing up to 8 dots/mm and 576 dots/line
- 80 mm or 58 mm paper width support
- QR code and PDF417 printing support
- Wall-mount ready for flexible deployment
- ”Drop-and-load” action for easy paper roll replacement
- Control over 2 cash drawers through 1 CR port
- Optional kitchen bell function
- Interface : USB (True USB & Virtual COM selectable) + optional Serial, Parallel, LAN or Wireless interface module
- Dimension : 148 mm (W) x 205 mm (D) x 143 mm (H); Weight : 1.2 kg
- Color : ivory, black or white

AURA PP-6900U

- 3" thermal printer with auto cutter
- Printing speed up to 200 mm/sec
- High-resolution printing up to 8 dots/mm and 576 dots/line
- 80 mm or 58 mm paper width support
- QR code and PDF417 printing support
- Wall-mount ready for flexible deployment
- ”Drop-and-load” action for easy paper roll replacement
- Control over 2 cash drawers through 1 CR port
- Optional kitchen bell function
- Interface : USB (True USB & Virtual COM selectable) + optional Serial, Parallel, LAN or Wireless interface module
- Dimension : 148 mm (W) x 205 mm (D) x 143 mm (H); Weight : 1.2 kg
- Color : ivory, black or white

AURA PP-5200F

- 2“ high-speed thermal printer with auto cutter
- Printing speed up to 220 mm/sec
- High-resolution printing up to 8 dots/mm and 432 dots/line
- QR code and PDF417 printing support
- Wall-mount ready for flexible deployment
- ”Drop-and-load” action for easy paper roll replacement
- Control over 2 cash drawers through 1 CR port
- Optional kitchen bell function
- Interface : USB (True USB & Virtual COM selectable) or Serial
- Dimension : 120 mm (W) x 203 mm (D) x 124 mm (H); Weight : 1.15 kg
- Color : Ivory, black or white

Programmable Keyboard

KB-6800 / KB-6800U

- Powerful programming capability
- Programming under DOS (KB-6800 only) and Windows, multiple page, multiple level, whole range key content, time delay, position sense answer back code, etc.
- True spill-resistant design
- Optional blank key, double key for alternative key group layout
- Optional MSR
- 70 programming keys + 6 position control key
- Key top size: 18 mm x 22 mm for single key
- Interface : PS/2 (KB-6800) or USB (KB-6800U)
- Dimension : 340 mm (W) x 150 mm (D) x 58 mm (H); Weight : 1.05 kg
- Color : Ivory or black

KB-6600 / KB-6600U

- Powerful programming capability
- Programming under DOS (KB-6600 only) and Windows, multiple page, multiple level, whole range key content, time delay, position sense answer back code, etc.
- True spill-resistant design
- Optional blank key, double key for alternative key group layout
- Optional MSR
- 84 programmable keys + 6 position control key
- Key top size : 19 mm x 19 mm for single key
- Interface : PS/2 (KB-6600) or USB (KB-6600U)
- Dimension : 340 mm (W) x 150 mm (D) x 58 mm (H); Weight : 1.09 kg
- Color : Ivory or black

KB-4000 / KB-4000U

- 40 programmable keys in 4 x 10 matrix structure
- Software program for non-English (European) language
- Optional MSR and Smartcard reader
- Interface : PS/2 (KB-4000) or USB (KB-4000U)
- Dimension: 210 mm (W) x 138 mm (D) x 56 mm (H); Weight : 0.87 kg
- Color : Ivory or black

Signature Pad

SP-1200

- ITO resistive touch pad over 3.8" FSTN LCD
- Adjustable LCD backlight contrast
- Display area 3" (H) x 2.3" (V) with resolution of 320 x 240
- Touch resolution : 500 dpi
- Tethered non-electronic stylus
- Low power consumption: 70mA @ 5V DC through USB interface
- Providing smooth bitmap and resolution required for signature verification
- Simultaneous view of electronic signature on LCD pad and display monitor for visual signature verification
- Interface : USB
- Dimension : 150 mm (W) x 122 mm (D) x 26 mm (H); Weight : 0.37 kg

Barcode Scanner

CD-3860R / CD-3860U

- 1D long-range handheld CCD scanner
- Large trigger for effortless operation
- Majority of 1D barcodes decoding support including GS1 DataBar
- Depth of Field : 0–350 mm at 20 mil
- Scan Rate : 330 scans/sec for single-line scanning
- Adjustable stand for hand-free operation (optional)
- Drop Resistance : 1.5 m
- Dimension : 152 mm x 64 mm x 105 mm; Weight : 120 g
- Interface : Serial (CD-3860R) or USB (CD-3860U)
- Color : black or white

CD-4860R / CD-4860U

- 2D handheld image CCD scanner
- Avant-garde design with transparent top cover
- Majority of 1D and 2D barcodes decoding support
- Depth of Field : 0 – 440 mm at 20 mil
- Scan Rate : 200 scans/sec in 1D mode
- Scan Rate : 56 images/sec in 2D mode
- Adjustable stand for hand-free operation (optional)
- Drop Resistance : 1m
- Dimension : 187 mm x 82 mm x64 mm; Weight : 150 g
- Interface support : Serial (CD-4860R) or USB (CD-4860U)
- Color : black or white

Barcode Scanner

MS-5145U / MS-5145R / MS-5145K

- 1D laser scanner
- Wider width of field than a typical CCD
- Depth of Field : 0 – 140 mm at 13 mil
- Scan Rate: 72 scans/sec for single-line scanning
- Barcode data can be custom edited
- Easy to program with Windows-based utility or barcode menu
- Drop Resistance : 1.5 m
- Dimension : 187 mm x 82 mm x 64 mm; Weight : 97 g
- Interface : USB (MS-5145U), Serial (MS-5145R) or PS/2 (MS-5145K)

LS-1000U

- 1D compact omnidirectional laser scanner with a detachable cradle
- Button switching between omnidirectional and single-line scanning
- Depth of Field : 0–200 mm (UPC/EAN 100%, PCS = 90%)
- Scan Patten : 5 directions of scan field, 20 scan lines
- Scan Rate : 1400 scans/sec for omnidirectional scanning
- Scan rate : 74 scans/sec for single-line scanning
- Stand alone or mounted solution
- Drop Resistance : 1.5 m
- Dimension : 111 mm (H) x 66 mm (D) x 70 mm (W); Weight : 200 g
- Interface : USB

Cash Drawer

TS-2200U / TS-2200R

- High performance 1D omnidirectional laser scanner
- Programmable sleep mode & Reactivated by simple push of a button
- Full automatic scanning operation
- Depth of Field : 300 mm (EAN 0.33 mm / 13 mil, PCS = 90%)
- Scan Patten : 7 directions of scan field, 24 scan lines
- Scan Rate : 2400 scans/sec for omnidirectional scanning
- Dimension : 152 mm (H) x 152 mm (W) x 91 mm (D); Weight : 450 g
- Interface : USB (TS-2200U) or Serial (TS-2200R)

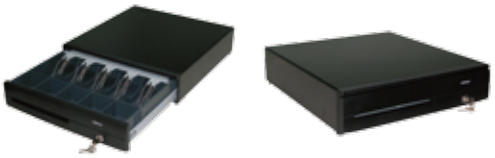

CR-6300 Series

- Heavy-duty cash drawer with innovative "Screwless" design
- Ruggedized with reinforced steel and anti-scratch painting
- Large ball bearings design for smooth drawer slide
- Precision mechanical fitting to assure wobble-free operation
- Three position lock to ensure maximum security
- Cheque slot for non-cash transaction
- Various cash tray configurations
- Additional tray cover with lock (optional)
- Dimension : 426 mm (W) x 456 mm (D) x 100 mm (H); Weight : 8.8 kg

CR-6310B : Printer driven, powered by printer or POSIFLEX system CR port, support 12V/24V voltage range
CR-6314B : Dedicated Serial, powered by 12V DC PC power kit
CR-6315B : USB, powered by 12V DC adaptor
CR-6325B : USB, powered by standard USB, auto step up to 12V

Cash Drawer

CR-4000 Series / CR-4100 Series

- Medium size cash drawer with innovative "Screwless" design
- 5 adjustable bill compartments with plastic bill clip on CR-4000 series
- 5 fixed bill compartments with metal bill clip on CR-4100 series
- 9 fixed coin compartments
- Additional tray cover with lock (optional)
- Precision mechanical fitting to ensure wobble-free operation
- Three position lock to ensure maximum security
- Cheque slot for non-cash transaction
- 255 drawer open codes defined via DIP switch for added programming flexibility (CR-4x02/CR-4x03)
- Serial In + Serial Out and Parallel In + Parallel Out connectors allow device to be daisy-chained after cash drawer (CR-4x02 / CR-4x03)
- Dimension : 428 mm (W) x 460 mm (D) x 100 mm (H); Weight : 6 kg

CR-4000/CR-4100 : Printer driven, powered by printer or POSIFLEX system CR port, support 12V/24V voltage range
CR-4001/CR-4101 : Dedicated Serial, powered by 12V DC adaptor
CR-4002/CR-4102 : Non-dedicated Serial, powered by 12V DC adaptor
CR-4003/CR-4103 : Parallel, powered by 12V DC adaptor
CR-4004/CR-4104 : Dedicated Serial, powered by 12V DC PC power kit
CR-4005/CR-4105 : USB, powered by 12V DC adaptor
CR-4015/CR-4115 : USB, powered by standard USB, auto step up to 12V

CR-3100 Series

- Compact cash drawer with innovative "Screwless" design
- Ruggedized with reinforced steel
- Large ball bearings design for smooth drawer slide
- Precision mechanical fitting to assure wobble-free operation
- 5 adjustable bill compartments with plastic bill clip
- 5 fixed bill compartments with metal bill clip for CR-3100-US
- Adjustable coin compartments
- Additional tray cover with lock (optional)
- Three position lock to ensure maximum security
- Cheque slot for non-cash transaction
- Dimension : 400 mm (W) x 410 mm (D) x 85 mm (H); Weight : 6.7 kg

CR-3100/CR-3100-US : Printer driven, powered by printer or POSIFLEX system CR port, support 12V/24V voltage range
CR-3104 : Dedicated Serial, powered by 12V DC PC power kit
CR-3115 : USB, powered by standard USB, auto step up to 12V

CR-2200 Series

- Flip-top cash drawer with innovative "Screwless" design
- Ruggedized Aluminum die-casting construction
- Cheque slot for non-cash transaction
- 2 fixed and 4 adjustable (total 6) bill compartments
- 1 fixed and 7 adjustable (total 8) coin compartments
- Additional tray cover with lock (optional)
- Dimension : 460 mm (W) x 175 mm (D) x 102 mm (H); Weight : 4.3 kg

CR-2210B : Printer driven, powered by printer or POSIFLEX system CR port, support 12V/24V voltage range
CR-2214B : Dedicated Serial, powered by 12V DC PC power kit
CR-2215B : USB, powered by 12V DC adaptor
CR-2225B : USB, powered by standard USB, auto step up to 12V

CR-2020B

- Flip-top cash drawer with innovative "Screwless" design
- Aluminum die-casting body with plastic top cover
- Cheque slot for non-cash transaction
- 6 fixed bill compartments
- 8 adjustable coin compartments
- Dimension : 480 mm (W) x 175 mm (D) x 102 mm (H); Weight : 4.3 kg
- Interface : Printer driven, powered by printer or POSIFLEX system CR port, support 12V/24V voltage range

System Side Attachment

SD Series

SD-266

- Side attachment with MSR for POSIFLEX TP series terminal
- Bi-directional swipe
- 3-track support
- Support ISO 7811 magnetic card
- Option : Finger Print Sensor
- Interface : USB
- System Supported : All TP series

SD-366

- Side attachment with MSR for POSIFLEX HT series terminal and 12” monitor
- Bi-directional swipe
- 3-track support
- Support ISO 7811 magnetic card
- Option : Finger Print Sensor
- Interface : USB
- System Supported : All HT series, TM/LM-2012X, LM-2212X

SD-466Z

- Side attachment with MSR for POSIFLEX 15”/17” KS series terminal and monitor
- Bi-directional swipe
- 3-track support
- Support ISO 7811 magnetic card
- Option : Finger Print Sensor
- Interface : USB
- System Supported : KS-6715, KS-7215, KS-7217, KS-7515, KS-7517, KS-7715, KS-7717, LM/TM-8115, LM-8025, TM-7117

SD-566W

- Side attachment with MSR for POSIFLEX 12” KS series terminal
- Bi-directional swipe
- 3-track support
- Support ISO 7811 magnetic card
- Option : Finger Print Sensor
- Interface : USB
- System Supported : KS-7212

SD-666W

- Side attachment with MSR for POSIFLEX 15”/17” KS series terminal
- Bi-directional swipe
- 3-track support
- Support ISO 7811 magnetic card
- Option : iButton Reader
- Interface : USB
- System Supported : KS-6715, KS-7215, KS-7217, KS-7515, KS-7517, KS-7715, KS-7717

SD-866W

- 3-in-1 side attachment with MSR for POSIFLEX 15”/17” KS series terminal
- Bi-directional swipe
- 3-track support
- Support ISO 7811 magnetic card
- Option : RFID module, USB WIFI Dongle
- Interface : USB
- System Supported : KS-6715, KS-7215, KS-7217, KS-7515, KS-7517, KS-7715, KS-7717

System Side Attachment

SD Series

SD-876W

- 3-in-1 side attachment with MSR for POSIFLEX TP series terminal
- Bi-directional swipe
- 3-track support
- Support ISO 7811 magnetic card
- Option : RFID module, USB WIFI Dongle
- Interface : USB
- System Supported : All TP series

System Side Attachment

SA Series

SA-104Z

- Side attachment with MSR for POSIFLEX 14” XT series
- Super slim design
- Bi-directional swipe
- 3-track support
- Support ISO 7811 magnetic card
- Interface : USB
- System Supported : XT-3114

SA-105Z

- Side attachment with MSR for POSIFLEX 15” XT series
- Super slim design
- Bi-directional swipe
- 3-track support
- Support ISO 7811 magnetic card
- Interface : USB
- System Supported : XT-3015, XT-4015

SA-204Z

- Side attachment with iButton reader for POSIFLEX 14” XT series
- Super slim design
- Interface : USB
- System Supported : XT-3114

SA-205Z

- Side attachment with iButton reader for POSIFLEX 15” XT series
- Super slim design
- Interface : USB
- System Supported : XT-3015, XT-4015

SA-305Z

- 3-in-1 side attachment with MSR for POSIFLEX 15” XT series terminal
- Bi-directional swipe
- 3-track support
- Support ISO 7811 magnetic card
- Option : RFID module, Finger Print Sensor
- Interface : USB
- System Supported : XT-3015, XT-4015

SA-405Z

- 3-in-1 side attachment with MSR for POSIFLEX 15” XT series terminal
- Bi-directional swipe
- 3-track support
- Support ISO 7811 magnetic card
- •USB 3G Dongle support
- Interface : USB
- System Supported : XT-3015, XT-4015

System Side Attachment

KP Series

KP-100

- Side keypad attachment for POSIFLEX TP series
- 40 programmable keys in 4 x 10 matrix structure
- Software program for non-English (European) language
- Optional MSR and Smartcard reader
- Interface : USB
- System Supported : All TP series

KP-200

- Side keypad attachment for POSIFLEX HT series
- 36 programmable keys + 6 position control key
- Software program for non-English (European) language
- Optional MSR and Smartcard reader
- Interface : USB
- System Supported : All HT series

KP-300W

- Side keypad attachment for POSIFLEX 15”/17” KS series
- 36 programmable keys + 6 position control key
- Software program for non-English (European) language
- Optional MSR
- Interface : USB
- System Supported : KS-6715, KS-7215, KS-7217, KS-7515, KS-7517, KS-7715, KS-7717

KP-312W

- Side keypad attachment for POSIFLEX 12” KS series
- 36 programmable keys + 6 position control key
- Software program for non-English (European) language
- Optional MSR
- Interface : USB
- System Supported : KS-7212

KP-450

- Side keypad attachment for POSIFLEX KS-7210 series
- 45 programmable keys
- Software program for non-English (European) language
- Interface : USB
- System Supported : KS-7210, KS-7210HS, KS-7210TS

KP-500

- Side keypad attachment for POSIFLEX 15” XT series
- 40 programmable keys
- Software program for non-English (European) language
- Optional MSR and RFID module
- Interface : USB
- System Supported : XT-3015, XT-4015

System Side Attachment

SL Series
FA Series

SL-105Z

- Side attachment with MSR for POSIFLEX 15” LM/TM-3000 series monitor
- Bi-directional swipe
- 3-track support
- Support ISO 7811 magnetic card
- Interface : USB
- System Supported : LM/TM-3015, LM/TM-3115

FA-266

- Side attachment with MSR for POSIFLEX FT series terminal
- Bi-directional swipe
- 3-track support
- Support ISO 7811 magnetic card
- Option : Finger Print Sensor
- Interface : USB
- System Supported : FT-7715

POSIFLEX Headquarters

POSIFLEX TECHNOLOGY INC.
No. 6, Wuquan Rd., Wugu Dist., New Taipei City 24886, Taiwan
Tel : +886-2-2299-1599 E-mail : sales@posiflex.com.tw
Fax : +886-2-2299-1819 Http://www.posiflex.com.tw

Design and Manufacturing In Taiwan by POSIFLEX Technology Inc.
The product information and specifications are subject to change without prior notice.

2013Q4C1